	ELECTRICITY DATA	APPROVED ELECTRICITY DATA	
OPENING TEMPERATURE	OFF:45±5℃	UL&C-UL873	Max. AC250/125V/5A
CLOSING TEMPERATURE	ON: 35℃	UL&C-UL2111	Max. AC120V/22A
CONTACT RESISTANCE	≤50mohm	CQC/TUV	Max. AC250V/125V/5A
DIELECTRIC STRENGTH	1500VAC/1 min.	CQC/TUV/CB	Max. AC250V/125V/16A

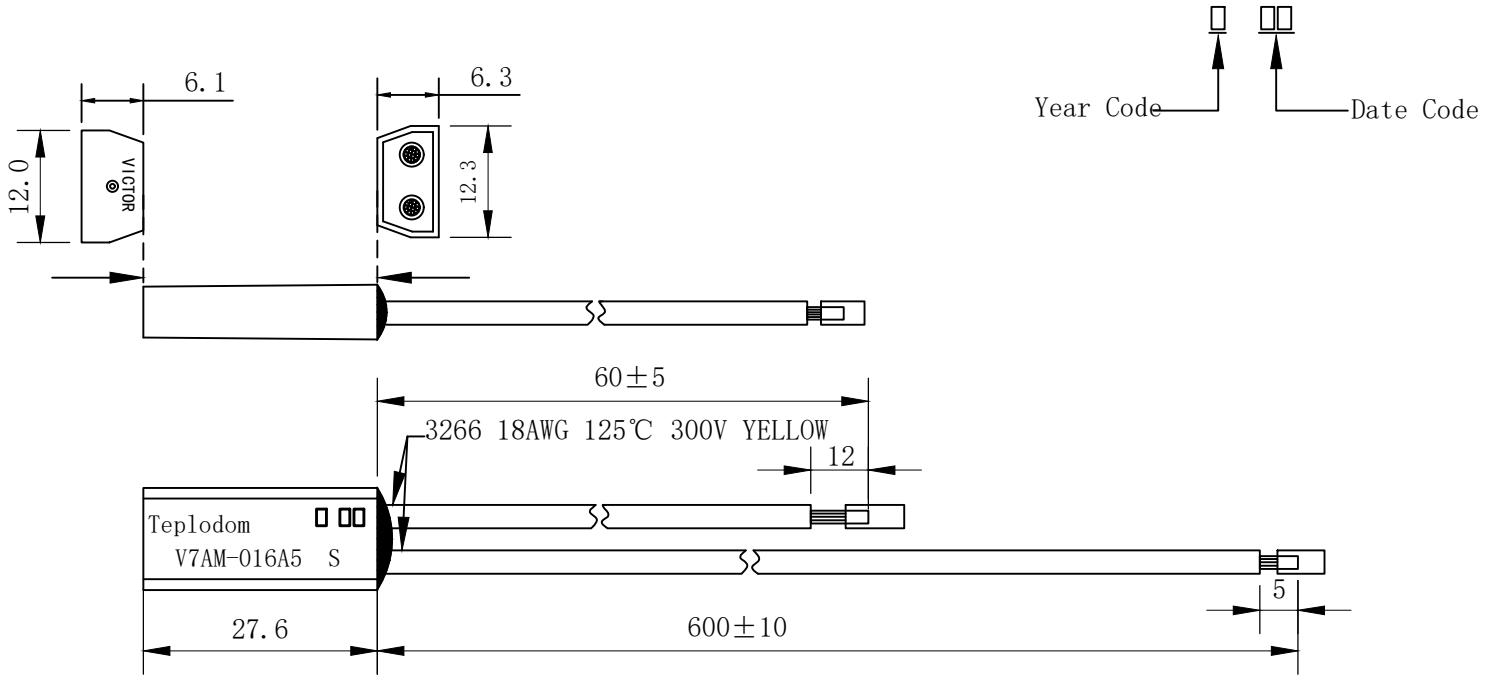

LETTER	REVISION RECORD	DATE	BY

NOTES:
Thermal Detected Side is Printed Side

Customer:
ANTAL

Tolerances:
X. ±1
.X ±0.6
.XX ±0.3
ANGLE ±1°

Title:
Thermal Protector

File No. QB-06-001

寧波友信電器有限公司
NINGBO VICTOR ELECTRIC CO.,LTD.

(MAT'L) (Q'TY)

SIZE A4

UNITS: mm

PART NUMBER V7AM-016A5 S
ACTION TYPE Snap Action
Dwg NO. ANTA-20120501
Customer Part No.

DR xiao 2020-12-05
ENG Joan Jin
CHECK Jun Zhao
PASS Enyong Wang
A